



# **iJRASET**

International Journal For Research in  
Applied Science and Engineering Technology



---

# **INTERNATIONAL JOURNAL FOR RESEARCH**

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

---

**Volume: 7      Issue: VIII      Month of publication: August 2019**

**DOI: <http://doi.org/10.22214/ijraset.2019.8088>**

**[www.ijraset.com](http://www.ijraset.com)**

**Call: ☎ 08813907089**

**E-mail ID: [ijraset@gmail.com](mailto:ijraset@gmail.com)**

# A Rectangular Ring Slot Microstrip Patch Antenna for Multiband Applications

Ravi Teja Gali<sup>1</sup>, Akhila John Davuluri<sup>2</sup>,  
<sup>1,2</sup>ECE Department, Acharya Nagarjuna University

**Abstract:** A Rectangular Microstrip patch antenna (MPA) for multiband applications is designed using slotting technique. The proposed antenna supports different range of frequencies, the antenna can be operated at four different bands i.e., X, S, Ku, and C band. The antenna is designed using FR-4 epoxy substrate with dielectric constant of 4.4 and loss tangent of 0.02. The dimensions of the substrate are 36.27 X 30.03 X 1.5748 mm<sup>3</sup>. The designed antenna resonates at the following frequencies 3.2, 5.3, 6.6, 8.7, 9.4, 10.2, 10.8, 11.4, 12.4, 13.1, and 14.5 GHz with a gain of 11.11, 7.094, 4.40, 1.19, 6.65, 4.47, 2.69, 4.23, 3.24, 8.25, and 5.89dB respectively. The performance of the antenna is analyzed by various parameters like Return loss, Gain and VSWR etc. The design of antenna carried out using HFSS 13.0 version.

**Keywords:** MPA, Gain, VSWR, HFSS, Return loss, multi bands, slots

## I. INTRODUCTION

In present days it is required that the antenna which will be operated at various frequencies for various applications. There are many advantages of using multiband antennas. One of them is prevents additional usage of bandwidth. There are many techniques for obtaining multiband antennas. Defected ground structure can be opted to obtain two and more bands with circular polarization abilities [1]. There are various other multiband antenna techniques. A rectangular micro strip antenna is used for various applications because of their attractive properties of light in weight, simple to fabrication, compact in size, economic in cost [2]. For these reasons patch antenna is used in this design. Micro strip line feeding technique is used in this design. In this paper rectangular slot is used on the patch to achieve multiband antenna characteristics. The resonating frequencies useful for wireless applications, military and satellite applications, and remote sensing applications.

There are various designs of Micro strip patch antenna with are proposed with different slots for different wireless applications [7]. Performance of the antenna system can be improved using different sized slots in the antenna design [6]. Then structure of the antenna and shape of the patch can also influence the performance dramatically [8]. In this paper the length and width of the designed antenna was calculated by considering the following design procedure [2] employing the rectangular ring slot in the patch antenna to achieve multiple bands. The designed antenna covers 3.2 GHz to 14.5 GHz bands.

## II. ANTENNA DESIGN CONSIDERATIONS

Rectangular microstrip patch antenna is modeled by using the following considerations. The simple rectangular patch antenna structure is given below in Fig 1. And the proposed design is shown in Fig 2.

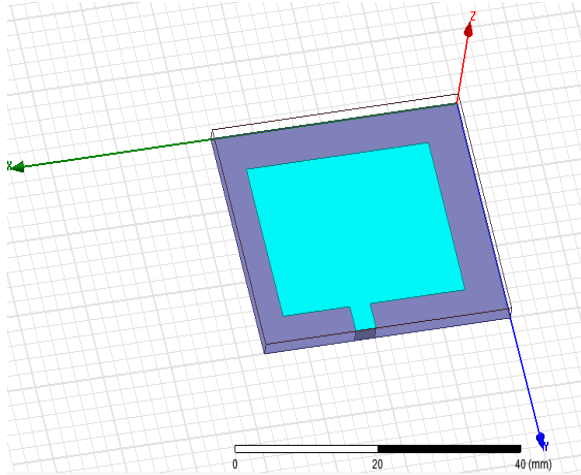


Fig. 1 Simple Rectangular Patch Antenna

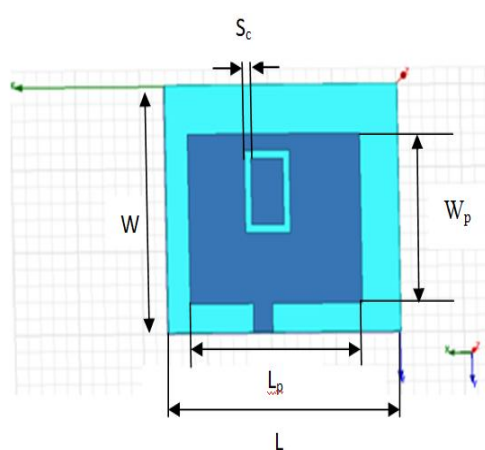


Fig. 2 Proposed Patch Antenna design

### A. Design Procedure

- 1) First choose the frequency of resonant  $f_r$  substrate thickness (h) and dielectric constant  $\epsilon_r$ .
- 2) The width and length of patch is calculated as follows:
- 3) Patch width is taken as

$$W = \frac{c}{2f_r} \sqrt{\frac{2}{\epsilon_r + 1}} \dots\dots\dots (1)$$

Where  $c = 3 \times 10^8$  m/s

- 4) The patch length is taken as

$$L = L_{eff} - 2\Delta L \dots\dots\dots (2)$$

$$L_{eff} = \frac{c}{2f_r \sqrt{\epsilon_{reff}}} \dots\dots\dots (3)$$

Where effective dielectric constant is

$$\epsilon_{reff} = \frac{\epsilon_r + 1}{2} + \frac{\epsilon_r - 1}{2} \left[ 1 + 12 \frac{h}{w} \right]^{-1/2} \dots\dots\dots (4)$$

Where Normalized extension length is

$$\Delta L = 0.412h \frac{(\epsilon_{reff} + 0.3) \left( \frac{w}{h} + 0.264 \right)}{(\epsilon_{reff} - 0.258) \left( \frac{w}{h} + 0.8 \right)} \dots\dots\dots (5)$$

- 5) The length of the substrate is taken as  $L_s = L + 6h$  and the width of the patch is taken as  $W_s = W + 6h$

TABLE I Antenna Design Parameters

S.No	Parameter	Notation	Value
1.	Relative Permittivity	$\epsilon_r$	4.4
2.	Operating Frequency(GHz)	$f_r$	3.4
3.	Height of Substrate(mm)	H	1.5748
4.	Substrate width(mm)	W	36.27
5.	Length of Substrate(mm)	L	30.03
6.	feed line width(mm)	$w_{feed}$	3
7.	Length of feed line(mm)	$l_{feed}$	12
8.	Length of the patch(mm)	$L_p$	20.59
9.	Width of the patch(mm)	$W_p$	26.83
10.	Ring slot width (mm)	$S_c$	1
11.	Length of the slot(mm)	$L_{slot}$	7

Where

$c$  is free space velocity.

$\epsilon_r$  is dielectric constant

$L$  is patch length.

$W$  is patch width.

$h$  is thickness of the substrate

$L_s$  is substrate length.

$W_s$  is substrate width

### III.SIMULATION RESULTS

- 1) **Return loss:** The phenomenon of propagation of signal reflected back when impedance mismatch occurs. The return loss is calculated as  $RL = -20 \log_{10} |\Gamma| (dB)$  .....(6)

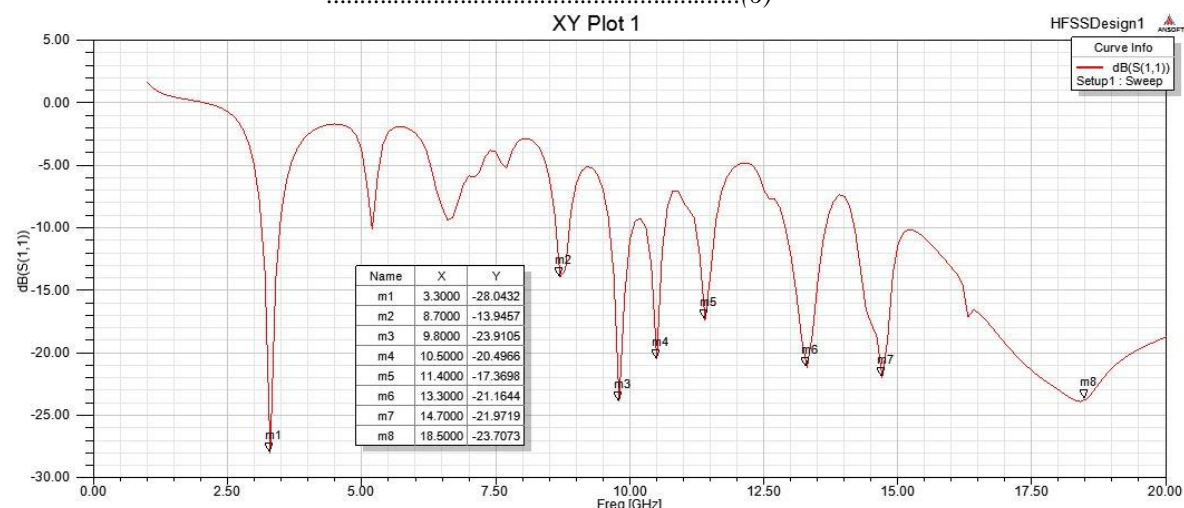


Fig. 3 Return loss plot for simple MPA

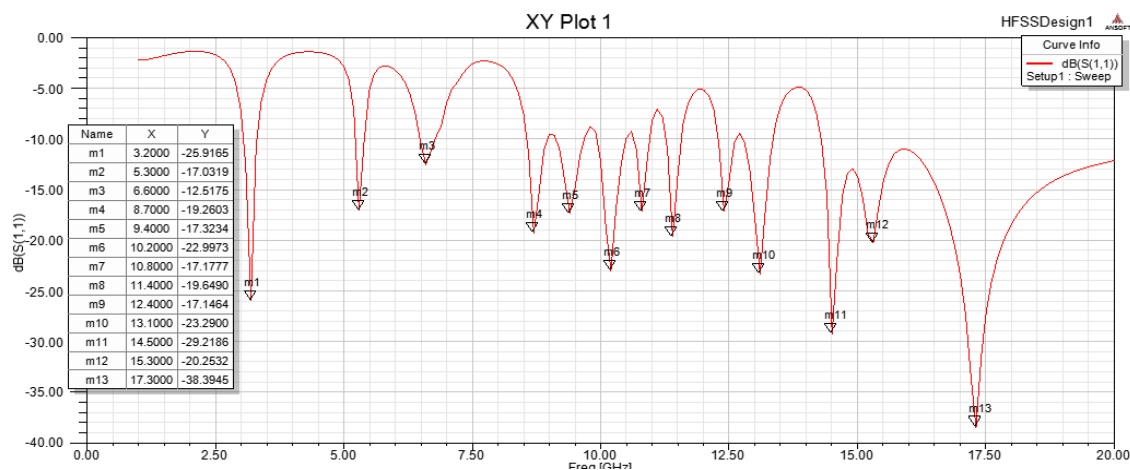


Fig. 4 Return loss for Slotted MPA

- 2) **VSWR:** It shows how much power is reflected back from the antenna. It is Expressed as

$$VSWR = \frac{1 + \Gamma}{1 - \Gamma} \dots\dots\dots (7)$$

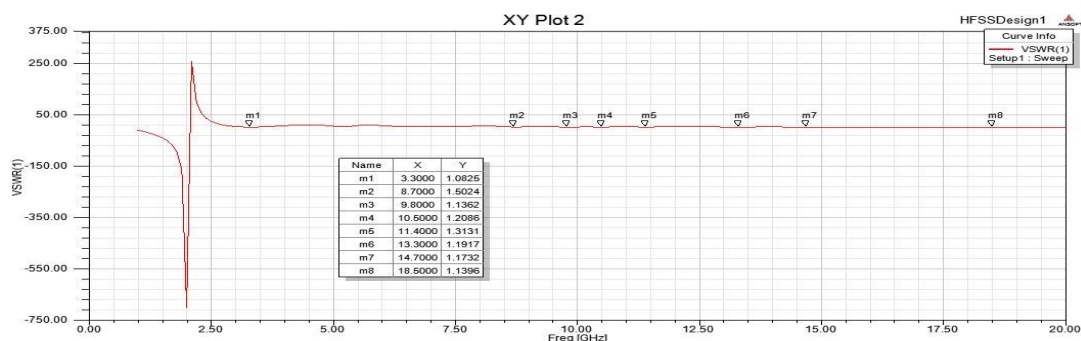


Fig. 5 VSWR plot for Simple MPA

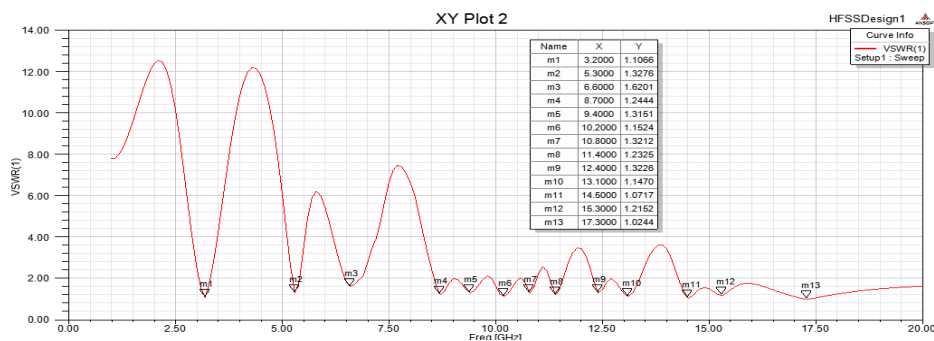


Fig. 6 VSWR plot for Slotted MPA

3) *Gain*: It is the amount of power transferred in that direction.

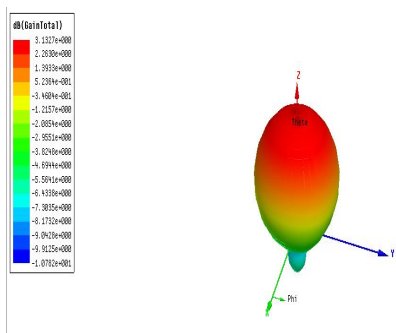


Fig. 7 Total gain of the Simple MPA

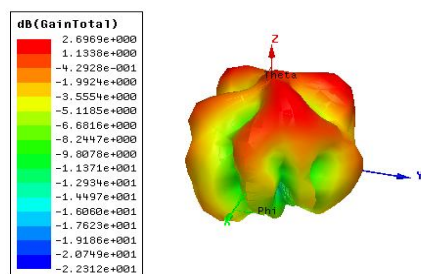


Fig. 8 Total gain of the Slotted MPA

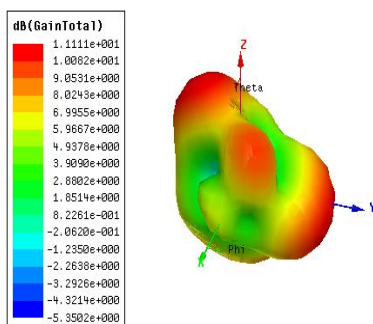


Fig. 9 Gain at 3.2 GHz

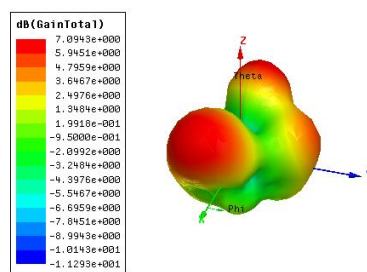


Fig. 10 Gain at 5.3 GHz

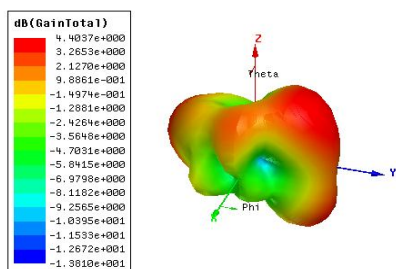


Fig. 11 Gain at 6.6 GHz

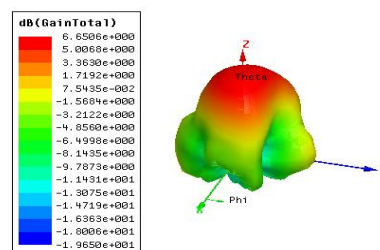


Fig. 12 Gain at 9.4 GHz

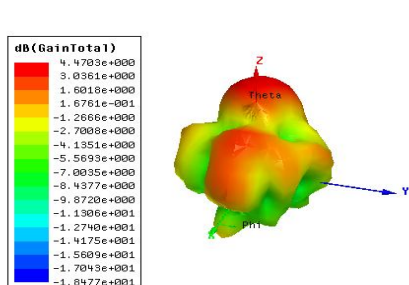


Fig. 13 Gain at 10.2 GHz

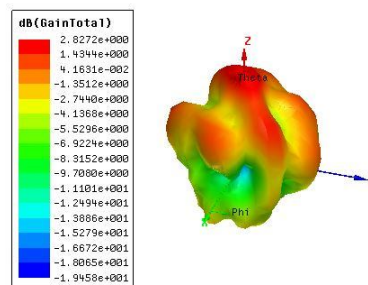


Fig. 14 Gain at 10.8 GHz




Fig. 15 Gain at 11.4 GHz

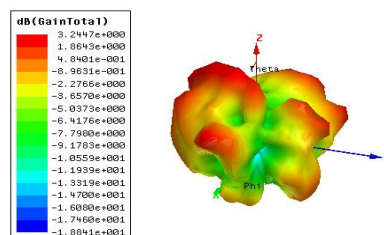


Fig. 16 12.4 GHz gain

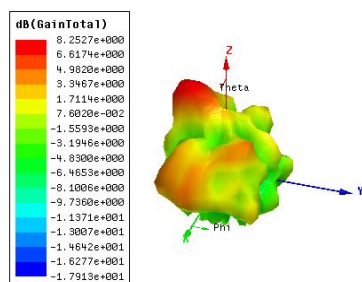


Fig. 17 Gain at 13.1 GHz

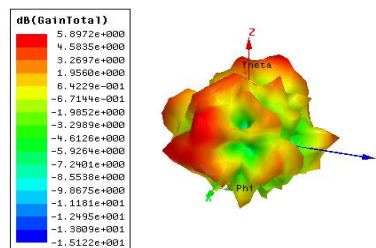


Fig. 18 Gain at 14.5 GHz

4) *Current distribution:* Slotted MPA current distribution at E-field and at H-field are bellow in following figures.

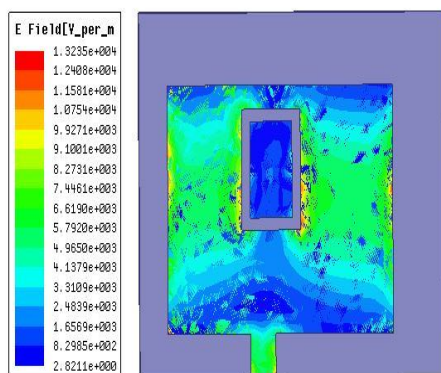


Fig. 19 Current distribuion at 3.4 GHz (E-plane)

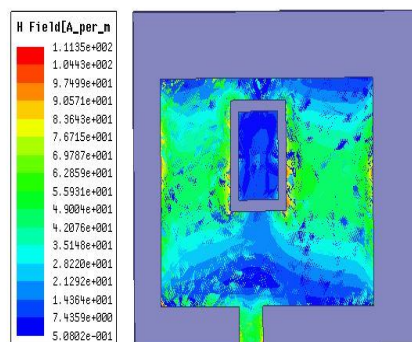


Fig. 20 Current distribuion at 3.4 GHz (H-plane)

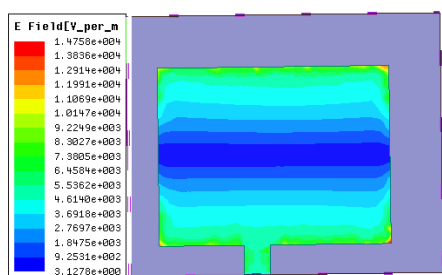


Fig. 21 E plane Current distributuon at 3.4 GHz

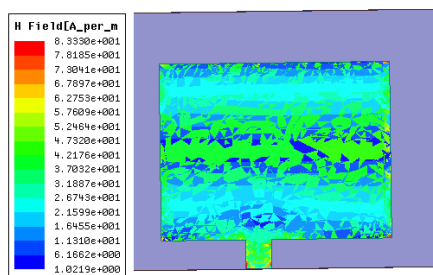


Fig. 22 Current distributuon at 3.4 GHz (H-plane)

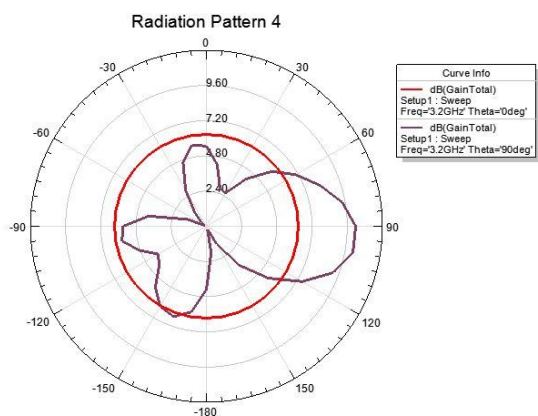


Fig. 23 H plane radiation pattern at 3.2 GHz

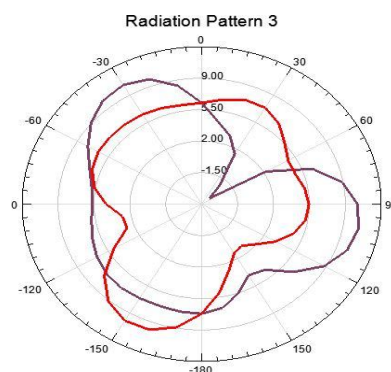


Fig.24 E plane radiation pattern at 3.2 GHz

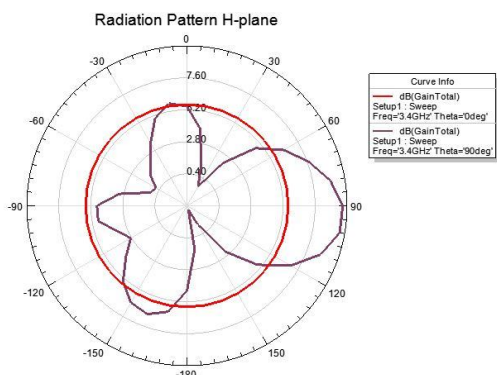


Fig. 25 Radiation pattern at 3.4 GHz (H-plane)




Fig. 26 Radiation pattern at 3.4 GHz (E-palne)

TABLE III

SIMULATED RESULTS OF SIMPLE ANTENNA

S.No	Frequency (GHz)	S11 (dB)	VSWR	Gain (dB)	Band width (MHz)
1.	3.3	-28.04	1.08	3.87	---
2.	8.7	-13.94	1.50	1.62	240
3.	9.8	-23.91	1.13	8.8	430
4.	10.5	-20.49	1.20	2.82	430
5.	11.4	-17.16	1.31	3.41	350
6.	13.3	-21.16	1.19	4.56	740

TABLE III  
SIMULATED RESULTS OF SLOTTED MPA

S.No	Frequency (GHz)	S11 (dB)	VSWR	Gain (dB)	Band width (MHz)
1.	3.2	-25.91	1.10	11.11	270
2.	5.3	-17.03	1.32	7.09	170
3.	6.6	-12.51	1.62	4.4	300
4.	8.7	-19.26	1.24	1.19	210
5.	9.4	-17.32	1.43	6.65	430
6.	10.2	-22.99	1.15	4.47	500
7.	10.8	-17.17	1.32	2.69	500
8.	11.4	-19.64	1.23	4.23	310
9.	12.4	-17.14	1.32	3.24	310
10.	13.1	-23.29	1.14	8.25	350
11.	14.5	-29.21	1.03	5.89	580

The designed slotted antenna compared with the simple rectangle patch antenna design the over all the designed antenna gain is increased to 11.11 dB and the number of resonating frequencies also increased from 6 to 11 . The design antenna supports high gain applications.

#### IV. CONCLUSIONS

The proposed multi Band antenna is resonating at eleven frequencies and has better gain and return loss. These are in the operating range of X band, S band, Ku band C band. The antenna proposed particularly radiates at 3.2, 5.3, 6.6, 8.7, 9.4, 10.2, 10.8, 11.4, 12.4, 13.1, and 14.5 GHz with gains of 11.11, 7.09, 4.4, 1.19, 6.65, 4.47, 2.69, 4.23, 3.24, 8.25, and 5.89 dB respectively. It is observed that antenna has high gain of 11.11 dB at 3.2 GHz. The proposed antenna is mostly preferred for wireless, military and satellite and remote sensing applications etc. The designed micro strip patch antenna is analyzed and simulated using HFFS 13.0 version software.

#### V. ACKNOWLEDGMENT

I would like to thanks to Dr P. Siddaiah, Principal, Professor of ECE, University College of Engineering Technology, Acharya Nagarjuna University, for providing the opportunity to work in Satellite data analytical centre for this project.

#### REFERENCES

- [1] Praveen Chaurasia, Binod kumar kanaujia, metamaterial based circularly polarized hexa band patch antenna with small frequency ratios for multiple wireless applications.
- [2] C.A Balanis Antenna theory analysis and design. 3rd ed. Hoboken (NJ): John Wiley; 2005; 816-856.
- [3] Stutzman WL, thiele GA. Antenna theory and design. 2<sup>nd</sup> edition New York: Wiley India pvt Ltd; 1998.
- [4] Chen CH, Yung EKN. Dual band circularly polarized CPW- Fed slot antenna with small frequency ratio and band widths. IEEE Tran Antennas propagation 2011;59:1379-1384
- [5] H.Wong, K.Luk, C.H.Chan small antennas in wireless communications, proceedings of the IEEE. vol.100, no. 7, pp.2109-2121, july 2012.
- [6] P. Khanna, K. Shingal and arun kumar, "Multiband annular ring microstrip antenna with defectd ground structure for wireless communication", International Journal of Computer applications, Vol.135, No.2, pp.19-25, 2016.
- [7] Xiaolang Li, Chao Li, "Design of High gain Multiple U-slot Micro strip patch antenna for wireless system", ICCP 2010 Proceedings.
- [8] Multiband microtripe patch antenna for wireless applications using metameterial. international journal of advanced research in electronics and communication engineering (IJARECE). 4(6). p.1497-1503.
- [9] Huiqing Zhai, Zhihui Ma, YuHan ,A compact printed antennas for triple band WLAN/WiMAX Applications, IEEE Antennas and wireless propagation letters, vol.12, pp.65-68, January 2013
- [10] H.-w Hsieh, Y.-c Lee, K.-K.Tiong, Design of multiband antenna for mobile handset applications, IEEE Antennas and wireless propagation letters, vol. 8, pp. 200-203, 2009.
- [11] Chandrasekharan Nataraj, Assia Ali Ismael, Compact "Multiband Microstrip Patch antenna with slot-rings for wire less applications", IEEE 15<sup>th</sup> student conference on Research and development.



10.22214/IJRASET



45.98



IMPACT FACTOR:  
7.129



IMPACT FACTOR:  
7.429



# INTERNATIONAL JOURNAL FOR RESEARCH

IN APPLIED SCIENCE & ENGINEERING TECHNOLOGY

Call : 08813907089  (24\*7 Support on Whatsapp)